

## Slim Gooseneck Swivel Mixer

Stainess Steel | 25mm Cartridge









### **PRODUCT FEATURES**

#### **BUILT TO ENDURE**

Crafted from solid 304 grade stainless steel, Belling Design tapware is lead free and highly resistant to rust and not prone to chipping like a traditional chrome mixer.

#### **HYGENIC**

All stainless-steel tapware is produced using "Soft Silk" technology which ensures a smooth, non-porous internal surface, resulting in no bacteria or water contamination.

#### **PREMIUM COMPONENTS**

A 25mm ceramic disc cartridge combined with an easy glide handle provides smooth operation and precise temperature control.

#### **5 STAR EFFICIENCY**

All stainless steel mixers offer a 5 Star WELS rating providing the perfect balance of flow rate and efficiency.

#### **COLOURS**









SWIVEL

Stainless Steel: BDTG200X



# Specifications, Dimensions and Installation

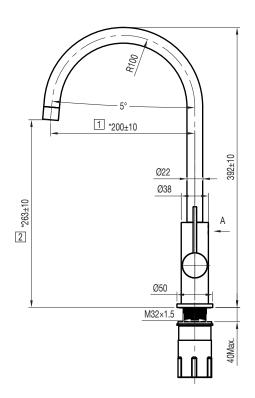



Style Gooseneck, Non Pull-Out Tap Swivel Range 360° Cartridge Size (mm) 25 WELS Star Rating 5 Flow Rate (Litres Per Minute) 5.5 Body Diameter (mm) 38 Spout Reach (mm) 200 Mixer Height (mm) 392 Material 304 Grade Stainless Steel Finish Stainless Steel  INSTALLATION Cut-Out (mm) Ø 35 Minimum Operating Pressure 150kPa Minimum Operating Temperature 1° Maximum Operating Temperature 70° DIMENSIONS (PACKED) Width x Height x Depth (mm) 525 x 86 x 335 Gross Weight (kg) 2.8  DIMENSIONS (PRODUCT) Width x Height x Depth (mm) 87.5 x 392 x 232 Net Weight (kg) 2.5		
Tap Swivel Range       360°         Cartridge Size (mm)       25         WELS Star Rating       5         Flow Rate (Litres Per Minute)       5.5         Body Diameter (mm)       38         Spout Reach (mm)       200         Mixer Height (mm)       392         Material       304 Grade Stainless Steel         Finish       Stainless Steel         INSTALLATION       0         Cut-Out (mm)       Ø 35         Minimum Operating Pressure       150kPa         Minimum Operating Temperature       1°         Maximum Operating Temperature       70°         DIMENSIONS (PACKED)       Vidth x Height x Depth (mm)       525 x 86 x 335         Gross Weight (kg)       2.8         DIMENSIONS (PRODUCT)       Width x Height x Depth (mm)       87.5 x 392 x 232         Net Weight (kg)       2.5	FEATURES	
Cartridge Size (mm)  WELS Star Rating Flow Rate (Litres Per Minute)  Body Diameter (mm)  Spout Reach (mm)  Mixer Height (mm)  Material  Finish  Stainless Steel  Finish  INSTALLATION  Cut-Out (mm)  Minimum Operating Pressure  Maximum Operating Temperature  DIMENSIONS (PACKED)  Width x Height x Depth (mm)  Gross Weight (kg)  DIMENSIONS (PRODUCT)  Width x Height x Depth (mm)  87.5 x 392 x 232  Net Weight (kg)  2.5	Style	Gooseneck, Non Pull-Out
WELS Star Rating         5           Flow Rate (Litres Per Minute)         5.5           Body Diameter (mm)         38           Spout Reach (mm)         200           Mixer Height (mm)         392           Material         304 Grade Stainless Steel           Finish         Stainless Steel           INSTALLATION         Cut-Out (mm)           Minimum Operating Pressure         150kPa           Minimum Operating Temperature         1°           Maximum Operating Temperature         70°           DIMENSIONS (PACKED)         Vidth x Height x Depth (mm)           Midth x Height x Depth (mm)         525 x 86 x 335           Gross Weight (kg)         2.8           DIMENSIONS (PRODUCT)         Width x Height x Depth (mm)           Width x Height x Depth (mm)         87.5 x 392 x 232           Net Weight (kg)         2.5	Tap Swivel Range	360°
Flow Rate (Litres Per Minute)   5.5	Cartridge Size (mm)	25
Body Diameter (mm)   38	WELS Star Rating	5
Spout Reach (mm)         200           Mixer Height (mm)         392           Material         304 Grade Stainless Steel           Finish         Stainless Steel           INSTALLATION         Ø 35           Cut-Out (mm)         Ø 35           Minimum Operating Pressure         150kPa           Minimum Operating Temperature         1°           Maximum Operating Temperature         70°           DIMENSIONS (PACKED)         Vidth x Height x Depth (mm)           Width x Height (kg)         2.8           DIMENSIONS (PRODUCT)         Width x Height x Depth (mm)           Width x Height x Depth (mm)         87.5 x 392 x 232           Net Weight (kg)         2.5	Flow Rate (Litres Per Minute)	5.5
Mixer Height (mm)         392           Material         304 Grade Stainless Steel           Finish         Stainless Steel           INSTALLATION         Ø 35           Cut-Out (mm)         Ø 35           Minimum Operating Pressure         150kPa           Minimum Operating Temperature         1°           Maximum Operating Pressure         500kPa           Maximum Operating Temperature         70°           DIMENSIONS (PACKED)         Vidth x Height x Depth (mm)           Gross Weight (kg)         2.8           DIMENSIONS (PRODUCT)         87.5 x 392 x 232           Net Weight (kg)         2.5	Body Diameter (mm)	38
Material         304 Grade Stainless Steel           Finish         Stainless Steel           INSTALLATION         Ø 35           Cut-Out (mm)         Ø 35           Minimum Operating Pressure         150kPa           Minimum Operating Temperature         1°           Maximum Operating Pressure         500kPa           Maximum Operating Temperature         70°           DIMENSIONS (PACKED)         Width x Height x Depth (mm)           Gross Weight (kg)         2.8           DIMENSIONS (PRODUCT)         87.5 x 392 x 232           Net Weight (kg)         2.5	Spout Reach (mm)	200
Finish  INSTALLATION  Cut-Out (mm)  Minimum Operating Pressure  Minimum Operating Temperature  Maximum Operating Pressure  Maximum Operating Temperature  Maximum Operating Temperature  Maximum Operating Temperature  DIMENSIONS (PACKED)  Width x Height x Depth (mm)  Gross Weight (kg)  DIMENSIONS (PRODUCT)  Width x Height x Depth (mm)  87.5 x 392 x 232  Net Weight (kg)  2.5	Mixer Height (mm)	392
INSTALLATION  Cut-Out (mm)  Minimum Operating Pressure  Minimum Operating Temperature  Maximum Operating Pressure  Maximum Operating Temperature  Maximum Operating Temperature  Too  DIMENSIONS (PACKED)  Width x Height x Depth (mm)  Gross Weight (kg)  DIMENSIONS (PRODUCT)  Width x Height x Depth (mm)  87.5 x 392 x 232  Net Weight (kg)  2.5	Material	304 Grade Stainless Steel
Cut-Out (mm)  Minimum Operating Pressure  Minimum Operating Temperature  Maximum Operating Pressure  Maximum Operating Pressure  Maximum Operating Temperature  DIMENSIONS (PACKED)  Width x Height x Depth (mm)  Gross Weight (kg)  DIMENSIONS (PRODUCT)  Width x Height x Depth (mm)  87.5 x 392 x 232  Net Weight (kg)  2.5	Finish	Stainless Steel
Minimum Operating Pressure         150kPa           Minimum Operating Temperature         1°           Maximum Operating Pressure         500kPa           Maximum Operating Temperature         70°           DIMENSIONS (PACKED)         S25 x 86 x 335           Gross Weight (kg)         2.8           DIMENSIONS (PRODUCT)         87.5 x 392 x 232           Net Weight (kg)         2.5	INSTALLATION	
Minimum Operating Temperature  Maximum Operating Pressure  Maximum Operating Temperature  Maximum Operating Temperature  Too  DIMENSIONS (PACKED)  Width x Height x Depth (mm)  Gross Weight (kg)  DIMENSIONS (PRODUCT)  Width x Height x Depth (mm)  87.5 x 392 x 232  Net Weight (kg)  2.5	Cut-Out (mm)	Ø 35
Maximum Operating Pressure       500kPa         Maximum Operating Temperature       70°         DIMENSIONS (PACKED)       525 x 86 x 335         Width x Height x Depth (mm)       525 x 86 x 335         Gross Weight (kg)       2.8         DIMENSIONS (PRODUCT)       Width x Height x Depth (mm)       87.5 x 392 x 232         Net Weight (kg)       2.5	Minimum Operating Pressure	150kPa
Maximum Operating Temperature  DIMENSIONS (PACKED)  Width x Height x Depth (mm)  Gross Weight (kg)  DIMENSIONS (PRODUCT)  Width x Height x Depth (mm)  87.5 x 392 x 232  Net Weight (kg)  2.5	Minimum Operating Temperature	1°
DIMENSIONS (PACKED)           Width x Height x Depth (mm)         525 x 86 x 335           Gross Weight (kg)         2.8           DIMENSIONS (PRODUCT)         Vidth x Height x Depth (mm)           Width x Height (kg)         87.5 x 392 x 232           Net Weight (kg)         2.5	Maximum Operating Pressure	500kPa
Width x Height x Depth (mm)       525 x 86 x 335         Gross Weight (kg)       2.8         DIMENSIONS (PRODUCT)         Width x Height x Depth (mm)       87.5 x 392 x 232         Net Weight (kg)       2.5	Maximum Operating Temperature	70°
Gross Weight (kg)         2.8           DIMENSIONS (PRODUCT)            Width x Height x Depth (mm)         87.5 x 392 x 232           Net Weight (kg)         2.5	DIMENSIONS (PACKED)	
DIMENSIONS (PRODUCT)           Width x Height x Depth (mm)         87.5 x 392 x 232           Net Weight (kg)         2.5	Width x Height x Depth (mm)	525 x 86 x 335
Width x Height x Depth (mm)       87.5 x 392 x 232         Net Weight (kg)       2.5	Gross Weight (kg)	2.8
Net Weight (kg) 2.5	DIMENSIONS (PRODUCT)	
	Width x Height x Depth (mm)	87.5 x 392 x 232
WARRANTY	Net Weight (kg)	2.5
	WARRANTY	
Parts & Labour 5 Years*	Parts & Labour	5 Years*
Cartridge 10 Years (Replacement Only*)	Cartridge	10 Years (Replacement Only*)

\*Terms and Conditions apply



Scan for more info